

# Technical data sheet

Vertical bend, three-compartment, height 48 mm

Item number: 7400665



Vertical bend, two-compartment, for vertical direction changes of screed-covered underfloor ducts (wall connections, supplies).



|    |                  |
|----|------------------|
| St | Steel            |
| FS | Strip galvanized |

## Master data

|                     |                          |
|---------------------|--------------------------|
| Item number         | 7400665                  |
| Description 1       | Vertical bend            |
| Description 2       | 3 compartments for EÜK-2 |
| Manufacturer        | OBO                      |
| Dimension           | 430x177,7x177,7          |
| Material            | Steel                    |
| Surface             | Strip galvanized         |
| Surface standard    | DIN EN 10346             |
| Smallest sales unit | 1                        |
| Unit of quantity    | Piece                    |
| Weight              | 134.88 kg                |
| Weight unit         | kg/100 pc.               |


# Technical data sheet

Vertical bend, three-compartment, height 48 mm

Item number: 7400665



## Dimensions

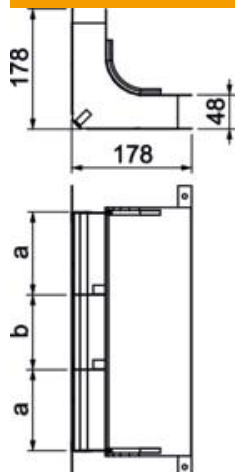

|             |        |
|-------------|--------|
| Length      | 178 mm |
| Width       | 350 mm |
| Height      | 48 mm  |
| Dimension a | 120 mm |
| Dimension b | 110 mm |
| Dimension h | 48 mm  |

## Technical data

|                                                   |                      |
|---------------------------------------------------|----------------------|
| Number of fixed partitions                        | 2                    |
| Number of compartments                            | 3 St.                |
| Suitable for screed-flush closed underfloor ducts | no                   |
| Suitable for screed-covered underfloor ducts      | yes                  |
| Trunking width, min.                              | 350 mm               |
| Duct height, min.                                 | 48 mm                |
| Cross-section, draw a                             | 5225 mm <sup>2</sup> |
| Cross-section, draw b                             | 5012 mm <sup>2</sup> |