

# Technical data sheet

90° socket, Italy, single, half module width

Item number: 6120758



90° Socket, single, Italy P17/11, with increased touch protection, with screw terminals, 2-pole, 16 A, 250 V~.



PC Polycarbonate

## Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6120758              |
| Type                | STD-IT0 SWGR0.5      |
| Description 1       | Socket 0°, single    |
| Description 2       | Italy , P17 / 11     |
| Manufacturer        | OBO                  |
| Dimension           | 22,5x45x37           |
| Colour              | Black-grey; RAL 7021 |
| Material            | Polycarbonate        |
| Smallest sales unit | 24                   |
| Unit of quantity    | Piece                |
| Weight              | 2.6 kg               |
| Weight unit         | kg/100 pc.           |


# Technical data sheet

90° socket, Italy, single, half module width

Item number: 6120758



## Dimensions

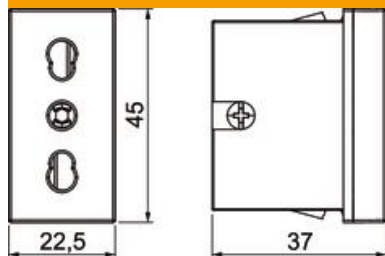

|        |         |
|--------|---------|
| Width  | 22.5 mm |
| Height | 45 mm   |

## Technical data

|                                                  |                              |
|--------------------------------------------------|------------------------------|
| Cover                                            | Central plate                |
| Closable                                         | no                           |
| Connection type                                  | Screw terminal               |
| Number of units                                  | 1                            |
| Number of switchable sockets                     | 0                            |
| Number of poles                                  | 2                            |
| Printed label/coding                             | Without printing             |
| Version for                                      | Italy                        |
| Surface version                                  | Matt                         |
| Version for                                      | Italian type P17/11          |
| Ejection mechanism                               | no                           |
| Fastening type                                   | Lock                         |
| Labelling panel                                  | no                           |
| Operating temperature, max.                      | 40 °C                        |
| Operating temperature, min.                      | -5 °C                        |
| Error current protection                         | no                           |
| For more difficult conditions (according to VDE) | no                           |
| Halogen-free                                     | yes                          |
| Hinged cover                                     | no                           |
| Warning light                                    | no                           |
| With on/off switch                               | no                           |
| With fine-wire fuse                              | no                           |
| With functional lighting                         | no                           |
| With orientation lighting                        | no                           |
| Mounting type                                    | Device installation duct     |
| Nominal voltage                                  | 250 V                        |
| Nominal current                                  | 16 A                         |
| Protection rating                                | Other                        |
| Special power supply                             | Without special power supply |
| Socket angle                                     | 0°                           |
| Depth                                            | 37 mm                        |
| Transparent                                      | no                           |
| Rotated central insert                           | no                           |
| Surge protection                                 | no                           |