

# Technical data sheet

## Trunking, type WDK 25040

Item number: 6026488



Wall and ceiling trunking, halogen-free, consisting of cover and base for mounting directly on the wall.  
During installation, ensure that only halogen-free accessories and fastening materials are used.



**PVC** Polyvinylchloride

### Master data

Item number	6026488
Type	WDK25040SW
Description 1	Wall trunking system
Description 2	with base perforation
Manufacturer	OBO
Dimension	2000x40x25
Colour	Jet black; RAL 9005
Material	Polyvinylchloride
Smallest sales unit	24
Unit of quantity	Metre
Weight	30 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	0,5892 kg CO2e / 1 Meter


# Technical data sheet

Trunking, type WDK 25040

Item number: 6026488



## Dimensions

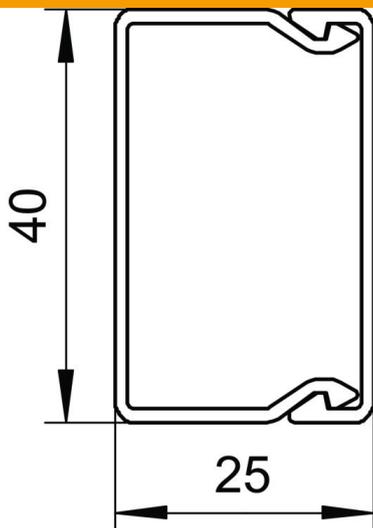

Length	2,000 mm
Width	40 mm
Height	25 mm

## Technical data

Number of fixed partitions	0
Number of cables NYM 3 x 1.5 mm <sup>2</sup> Ø 10.5 mm (without socket)	5
Number of cables NYM 3 x 2.5 mm <sup>2</sup> Ø 11.5 mm (without socket)	3
Number of cables NYM 5 x 1.5 mm <sup>2</sup> Ø 12.0 mm (without socket)	3
Number of insertable partitions	0
Version, cable trunking cover	Loose
Fastening type	Base perforation
Maintain electrical functions	no
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Delivery on a roll	no
Usable cross-section	792 mm <sup>2</sup>
Protection rating	IP30
Protective film	no
Protection rating IK code	IK04
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C