


# Technical data sheet

## External corner cover, for trunking type WDK 25040

Item number: 6191774



External corner hood for changing the direction of the WDK trunking.

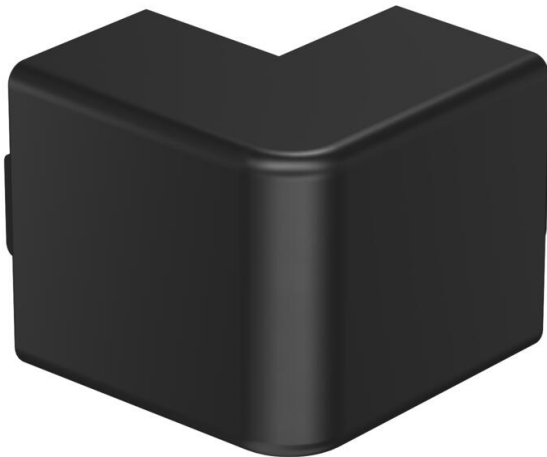

**PVC** Polyvinylchloride

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6191774                  |
| Type                               | WDK HA25040SW            |
| Description 1                      | External corner hood     |
| Manufacturer                       | OBO                      |
| Dimension                          | 25x40                    |
| Colour                             | Jet black; RAL 9005      |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 4                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 2.052 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0905 kg CO2e / 1 Piece |

### Dimensions

|             |       |
|-------------|-------|
| Length      | 52 mm |
| Width       | 40 mm |
| Height      | 25 mm |
| Dimension a | 52 mm |
| Dimension H | 40 mm |

# Technical data sheet

External corner cover, for trunking type WDK 25040

Item number: 6191774



## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Version for                       | Hood fitting |
| Fastening type                    | Lockable     |
| Maintain electrical functions     | no           |
| for duct dimension                | 25 x 40      |
| Halogen-free                      | no           |
| Trunking depth                    | 25 mm        |
| Protective film                   | no           |
| Self-extinguishing                | yes          |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -5 °C        |
| Angle range, max.                 | 90 mm        |
| Angle range, min.                 | 90 mm        |