# Technical data sheet

## Parallel connector Rd 8 mm, M10 x 30

## Item number: 5315700

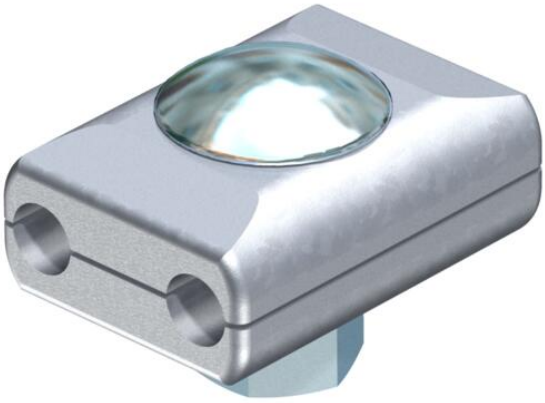

- With flat, round screw M10 x 30 and hexagonal nut, hot-dip galvanised steel

Zn Die-cast zinc

G Electrogalvanized

### Master data

| | |
|---|---|
| Item number | 5315700 |
| Type | 260 8 |
| Description 1 | Parallel connector |
| Manufacturer | OBO |
| Dimension | 8x8mm |
| Material | Die-cast zinc |
| Surface | Electrogalvanised |
| Surface standard | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit | 50 |
| Unit of quantity | Units |
| Weight | 13,93 kg |
| Weight unit | kg/100 pairs |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5314 kg CO2e / 1 Piece |

# Technical data sheet

## Parallel connector Rd 8 mm, M10 x 30

## Item number: 5315700

### Dimensions

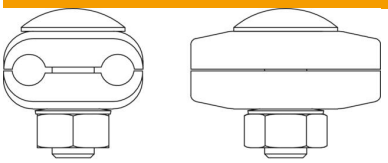




### Technical specifications

| | |
|---|---|
| Type of fastening screw | Hex set screw |
| Type of connector | Parallel connector |
| Lightning current carrying capacity | H/100 kA |
| Suitable for connection | Round conductor Rd 8 / Rd 8 |
| Fit | Rd 8 mm |
| Round conductor diameter, conductor 1, max. | 8 mm |
| Round conductor diameter, conductor 1, min. | 8 mm |
| Round conductor diameter, conductor 2, max. | 8 mm |
| Round conductor diameter, conductor 2, min. | 8 mm |
| Intermediate plate | no |